
4 PAGE INSERT SPECIFICATIONS



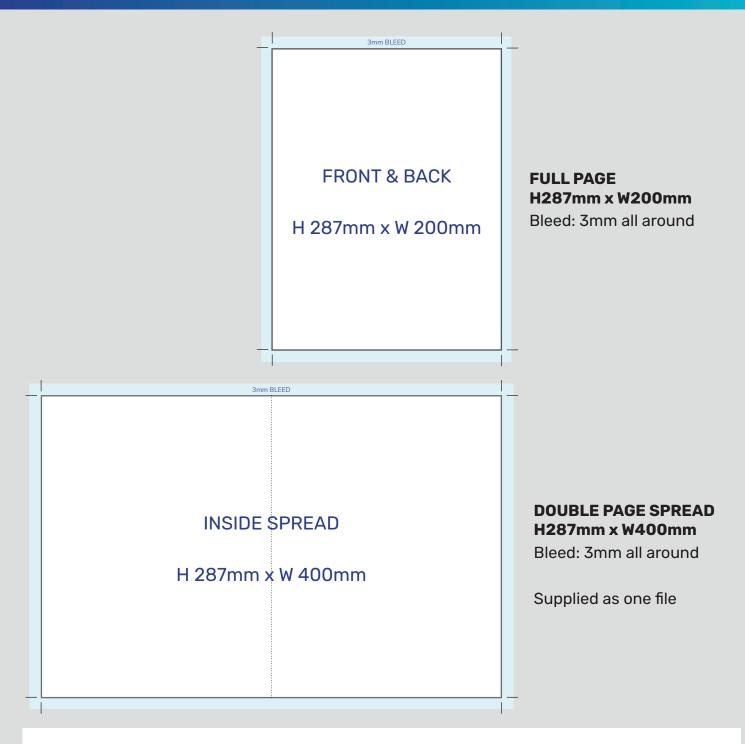

PRINT FILE SPECIFICATION

- All files to be supplied with trim marks and 3mm bleed
- All files transmitted to us should be Hi-Res (300dpi) PDF
- Colour CMYK. Pantone with appropriate CMYK Mapping is accepted
- Fonts All fonts MUST be embedded, Type I or True Type only
- Type safe area 10mm from trim